

08-10-00

A

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No. <b>KCX-355(16018)</b>
	First Inventor or Application Identifier <b>Les Long</b>
	Title <b>METHOD AND SYSTEM FOR REPLACING.WEB...</b>
	Express Mail Label No. <b>EL471680903US</b>

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents.	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing) 2. <input checked="" type="checkbox"/> Specification [Total Pages <b>20</b> ] (preferred arrangement set forth below) - Descriptive title of the invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the invention - Brief Summary of the invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets <b>8</b> ] 4. Oath or Declaration [Total Pages <b>1</b> ] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	5. <input type="checkbox"/> Microfiche Computer Program (Appendix) 6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies <b>ACCOMPANYING APPLICATION PARTS</b> 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) * Small Entity <input type="checkbox"/> Statement filed in prior application, Status still proper and desired 13. <input type="checkbox"/> Statement(s) <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 14. <input type="checkbox"/> Other: <b>Express Mailing Cert..</b> 15. <input checked="" type="checkbox"/>
<b>* NOTE FOR ITEMS 1 &amp; 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).</b>	

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_  
 Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_  
**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label \_\_\_\_\_ or ☒ Correspondence address below  
 (Insert Customer No. or Attach bar code label here)

Name	Jason W. Johnston				
	Dority & Manning, P.A.				
Address	700 East North Street, Suite 15				
City	Greenville	State	SC	Zip Code	29601
Country	U.S.	Telephone	(864) 271-1592	Fax	(864) 233-7342

Name (Pnn/Type)	Jason W. Johnston	Registration No. (Attorney/Agent)	45,675
Signature	<i>Jason Johnston</i>	Date	8/9/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

EXPRESS MAIL CERTIFICATE OF MAILING

In re Application of: Les Long

Entitled: METHOD AND SYSTEM FOR REPLACING WEB  
FOLDING BOARDS

"Express Mail" - Mailing Label Number EL471680903US

Date of Deposit August 9, 2000

I hereby certify that this paper and all attachments and any fee are being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box PATENT APPLICATION, Washington D.C. 20231.

Lynn D. Hoefer

(Typed or printed name of person mailing paper or fee)

Lynn D. Hoefer

(Signature of person mailing paper or fee)

000000 "2000" 000000

**PATENT**

**ATTORNEY DOCKET NO.: KCX-355(16018)**

**UNITED STATES PATENT APPLICATION**

**ENTITLED**

**METHOD AND SYSTEM FOR REPLACING WEB FOLDING BOARDS**

**BY**

**LES LONG**

006020" 210402 040900

**METHOD AND SYSTEM FOR REPLACING WEB FOLDING BOARDS**

**Background of the Invention**

Various types of products, such as facial tissues, napkins, wipes, etc., are folded and stacked, and then cut to length to store in a container or dispenser. For example, facial tissues are commonly folded in a manner such that a consumer can more easily grasp one or more of the tissues from the box. In the past, webs have been folded using a device known as a folding board. For instance, some examples of such folding boards are described in U.S. Patent No. 4,052,048 to Shirasaka.

A folder generally receives a web and, depending on the design of the folding board, folds the web into a certain configuration. In certain instances, it is often desired to utilize more than one folding board to fold one or more webs. For example, during facial tissue converting, a tissue web is continuously unwound from a roll, redirected by a turning bar, folded, and laid down onto previously folded tissue webs to form a continuous stack of tissues. These operations are carried out in a machine known as a multifold that uses multiple folding boards to fold multiple webs.

One problem currently associated with conventional multifolders, however, is that they typically contain only one set of folding boards. To utilize a set of folders having a different size or configuration, the folding boards must be manually interchanged by removing each individual folding board from the line. Unfortunately, such manual interchanging of folding boards can require a substantial amount of time and energy. Moreover, such manual interchanging often results in the misalignment of the folding boards.

As such, a need currently exists for a system and method for more

efficiently replacing a set of folding boards with another set of folding boards.

### **Summary of the Invention**

5 In accordance with one embodiment of the present invention, a  
a method for selectively replacing one set of folding boards with another  
set of folding boards is disclosed. The method includes the steps of  
placing a first set containing at least two folding boards in a web-receiving  
position. In some embodiments, the first set and/or second set of folding  
boards are rotatable about an axis. The method includes the step of  
10 selectively transferring the first set of folding boards from the web-  
receiving position to a first inactive position. Moreover, the method also  
includes the step of selectively transferring a second set containing at  
least two folding boards to the web-receiving position such that the folding  
boards within the second set are simultaneously transferred to the web-  
15 receiving position. For example, in one embodiment, the step of  
selectively transferring the second set of folding boards into the web-  
receiving position can be accomplished by rotating the second set about  
an axis such that it moves from a first inactive position to the web-  
receiving position.

20 In some embodiments, the method can also include the step of  
selectively transferring the first set of folding boards from the web-  
receiving position to a first inactive position. Moreover, in other  
embodiments, the method can include the step of selectively transferring  
the first set of folding boards from the web-receiving position to a second  
25 inactive position. In such instances, a third set of folding boards may, in  
some embodiments, be placed in the second inactive position and  
selectively transferred from the second inactive position to the first  
inactive position. In one embodiment, the third set of folding boards can  
also be rotatable about an axis.

30 In accordance with another embodiment of the present invention, a

a method for selectively replacing one set of folding boards with another set of folding boards is disclosed. The method includes the steps of placing a first set of folding boards in a web-receiving position and placing a second set of folding boards in a first inactive position. Each set of folding boards is rotatable about an axis. The method includes the step of selectively rotating the second set of folding boards from the first inactive position to the web-receiving position. Further, the method includes the step of selectively rotating the first set of folding boards from the web-receiving position to either the first inactive position or a second inactive position. In some instances, a third set of folding boards may, in some embodiments, also be placed in the second inactive position and selectively rotated from the second inactive position to the first inactive position.

In accordance with still another embodiment of the present invention, a system for selectively replacing one set of folding boards with another set of folding boards is disclosed. The system includes a first frame assembly secured to a first set of folding boards and a second frame assembly secured to a second set of folding boards. The first frame assembly and/or the second frame assembly can, in some embodiments, contain a frame that is continuous or discontinuous.

Each frame assembly is rotatable about an axis into a web-receiving position. In addition, the second frame assembly is in operative communication with the first frame assembly such that the second frame assembly and the first frame assembly are simultaneously rotatable about an axis. For example, in some embodiments, the first frame assembly and said second frame assembly are connected to at least one mounting arm. In one embodiment, to induce rotation of the first frame assembly and second frame assembly, a rotary actuator can be utilized. In another embodiment, rotation can be induced by a motor.

In some embodiments of the present invention, the system can

contain a locking assembly for selectively locking a set of folding boards into the web-receiving position. For example, in one embodiment, the locking assembly includes a locking pin, which may, in some instances, also be provided with an air channel for removing dust from a set of folding boards located at said web-receiving position.

Other features and aspects of the present invention are discussed in greater detail below.

### **Brief Description of the Drawings**

A full and enabling disclosure of the present invention, including the best mode thereof, directed to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, which makes reference to the appended figures in which:

Figure 1 is a perspective view of one embodiment of a system of the present invention;

Figure 2 is a side view of the embodiment of the system depicted in Fig. 1;

Figure 3 is a front view of the embodiment of the system depicted in Fig. 1;

Figure 4 is a perspective view of another embodiment of a system of the present invention;

Figure 5 is a side view of the embodiment of the system depicted in Fig. 4;

Figure 6 is a perspective view of still another embodiment of a system of the present invention;

Figure 7 is a top view of one embodiment of a locking assembly that can be used in the present invention;

Figure 8 is a cross-sectional view of the locking assembly shown in Figure 7 taken along a line 8-8 in Fig. 7; and

Figure 9 is a side view of another embodiment of a system of the present invention.

Repeat use of reference characters in the present specification and drawings is intended to represent same or analogous features or elements of the invention.

### **Detailed Description of Representative Embodiments**

5           Reference now will be made in detail to various embodiments of the invention, one or more examples of which are set forth below. Each example is provided by way of explanation of the invention, not limitation of the invention. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope or spirit of the invention. For instance, features illustrated or described as part of one embodiment, can be used on another embodiment to yield a still further embodiment. Thus, it is intended that the present invention cover such modifications and variations as come within the scope of the appended claims and their equivalents.

10           In general, the present invention is directed to a method and system for selectively replacing one set of folding boards with another set of folding boards. In one embodiment of the present invention, the system includes a first frame assembly secured to a first set of folding boards and a second frame assembly secured to a second set of folding boards. Each frame assembly is rotatable about an axis such that the assemblies are capable of moving in and out of a web-receiving position. By utilizing a system and method of the present invention, it has been discovered that a set of folding boards can be quickly and efficiently replaced with another set of folding boards.

20           Referring to Fig. 1, for example, one embodiment a system 10 of the present invention is shown that is capable of selectively replacing one set of folding boards for another set of folding boards. As referred to herein, a "set" of folding boards generally includes one or more folding boards. For example, as shown in Fig. 2, a first set 12 can contain four

25           

30



folding boards 20, 21, 23, and 25. In other embodiments, as shown in Fig. 6, a set can include a single folding board 93 or a set can include folding boards 93, 94 and 95.

Any conventional folding board may be utilized in the present invention to impart any type of fold to one or more webs. Specifically, it should be understood that the present invention is not limited to any particular folding board type, size, or design. In fact, any device, assembly, or mechanism that is capable of imparting one or more folds to one or more webs can be utilized as a folding board in the present invention. For example, some suitable folding boards are described in U.S. Patent Nos. 3,401,927 to Frick; 4,052,048 to Shirasaka; 4,502,675 to Clark, et al.; 5,868,276 to Loppnow, et al.; and 5,992,682 to Loppnow, et al., which are incorporated herein in their entirety by reference thereto.

Referring to Figs. 1-4, some specific examples of folding boards that can be used in the present invention are illustrated. As shown in Fig. 2, the first set 12 includes folding boards 20, 21, 23, and 25. The folding boards 20, 21, 23, and 25 can be designed to fold one or more webs into a variety of different fold configurations. In this embodiment, for example, the folding board 21 is configured to impart an interfolded, V-fold to the web. Moreover, the folding board 25 is configured to impart a conventional C-fold to a web. However, it should also be understood that any other type of fold can be imparted by the folding boards 20, 21, 23, and 25. Moreover, it should also be understood that the folds imparted by the folding boards may be identical or different.

Referring to Fig. 1, in one embodiment of the present invention, the first set 12 of folding boards is initially provided in a web-receiving position 100. At the web-receiving position 100, the folding boards of the first set 12 are capable of receiving one or more webs, such as tissue webs, which can be provided by an unwinding roll (not shown). For example, as

shown in Figs. 1-3, two continuous webs can be provided by an unwinding roll (not shown) to be folded by the folding board 21. In one embodiment, the first web can initially pass through guide bars 14 and 15 at an angle of about 45 degrees, while a second web can be passed through guide bars 15 and 45 at an angle of about 45 degrees. Thereafter, the path of the first web is deflected by a turning bar 16 and the path of the second web is deflected by a turning bar 18. From the turning bars 16 and 18, the second web and first web, which is superimposed over the second web, are both maneuvered under a panel 46 of the folding board 21. The folding board 21 then folds the moving webs into a certain fold configuration.

In one embodiment, a second set 42 of folding boards can also be provided in a first inactive position 200. In addition, other sets of folding boards may also be utilized. For example, referring to Fig. 4, a third set 48 of folding boards can be provided in a second inactive position 300. Moreover, referring to Fig. 9, a fourth set 49 of folding arms can be provided in a third inactive position 400. At the first inactive position 200, second position 300, or third position 400, the folding boards are typically not used to fold webs. However, it should be understood that, in some embodiments, a set of folding boards provided at the first inactive position 200, the second inactive position 300, or the third inactive position 400 may be used to fold one or more webs. Moreover, other types of operations may occur at the first inactive position 200, the second inactive position 300, or the third inactive position 400, such as cleaning, sanitizing, etc.

Furthermore, in some embodiments, the web-receiving position 100 can actually contain more than one position. For instance, as shown in Fig. 9, the web-receiving position 100 contains an intermediate position 100a and an end position 100b. For example, in one embodiment, the

first set 12 of folders is placed in an intermediate position 100a. At the intermediate position 100a, the first set 12 of folding boards can then be moved along a rail 97 into the end position 100b, where it can receive one or more webs. In this embodiment, the first set 12 of folding boards has  
5 wheels that enable the first set 12 to be more easily moved on a track formed by the rail 97.

In accordance with one embodiment of the present invention, the first set 12 of folding boards can be selectively replaced with the second set 42 of folding boards. For instance, referring to Figs. 1-3, the folding  
10 boards of the first set 12 are each mounted to a frame assembly 22. In this embodiment, the frame assembly 22 includes a frame 26 that is secured to the folding boards via a mounting rail 24. The frame 26 may be continuous, such as shown in Fig. 1, or discontinuous, as shown in Fig 6. When utilized, for example, a discontinuous frame 26 can allow a set  
15 containing the folding boards 93, 94 and 95 to be rotated about the axis A without rotating the other folding boards.

Similarly, the folding boards of the second set 42 are each secured to a frame assembly 50. The frame assembly 50 may include a frame 51 that is secured to the folding boards via a mounting rail 52. The frame 51  
20 may also be continuous or discontinuous, as described above. As shown, in one embodiment the frames 26 and 51 are secured to opposing ends 53 and 55 of two mounting arms 56. In some embodiments, the mounting arms 56 are capable of rotating about an axis A such that the frames 26 and 51 can also be rotated thereabout.

For example, as shown in Figs. 4-5, one embodiment of the present invention includes a rotary actuator 80 that is capable of rotating one or more mounting arms 56 about an axis A. As shown, the mounting  
25 arms 56 are rotatably secured to the rotary actuator 80 via a shaft 79. In this embodiment, the rotary actuator 80 is mounted to upstanding

members 77 to anchor the system 10 thereto. Any conventional rotary actuator can be utilized in the present invention to impart rotation to the mounting arms 56. For example, one suitable rotary actuator is an HP Series rack-and-pinion rotary actuator made by Parker-Hannifin Corporation.

When utilized, the rotary actuator 80 can rotate the mounting arms 56 approximately 180 degrees in either a clockwise or counter-clockwise direction. For example, a rotary actuator 80 can rotate the mounting arms 56 in a clockwise direction such that the third set 48 of folding boards is rotated to the web-receiving position 100, the second set 42 of folding boards is rotated to and the first set 12 of folding boards is rotated to the first inactive position 200. Moreover, to return the sets of folding boards to their initial positions, the rotary actuator 80 can rotate the mounting arms 56 in a counter-clockwise direction such that the first set 12 of folding boards is located in the web-receiving position 100 and the second set 42 of folding boards is located in the first inactive position 200. In addition to utilizing a rotary actuator 80, manual rotation or any device capable of automatically rotating the mounting arms 56 can generally be utilized. For example, referring to Fig. 1, a motor/gearbox arrangement 61 can also be used to rotate the mounting arm 56 about an axis A. As shown, the mounting arms 56 are rotatably secured to the motor/gearbox arrangement 61 via a shaft 63. In this embodiment, the motor/gearbox arrangement 61 is mounted to upstanding members 77 to anchor the system 10 thereto. Any known motor/gearbox arrangement can generally be utilized to impart rotation to the mounting arms 56. When utilized, the motor/gearbox arrangement 61 can rotate the mounting arms 56 up to 360 degrees in either a clockwise or counter-clockwise direction. For example, a motor/gearbox arrangement 61 can rotate the mounting arms 56 in a clockwise direction such that the second set 42 of folding boards is

rotated to the web-receiving position 100 and the first set 12 of folding boards is rotated to the first inactive position 200. Moreover, to return the sets of folding boards to their initial positions, the motor/gearbox arrangement 61 can further rotate the mounting arms 56 in a clockwise direction such that the first set 12 of folding boards is located in the web-receiving position 100 and the second set 42 of folding boards is located in the first inactive position 200.

In some embodiments, once positioned in the web-receiving position 100, the first set 12 or second set 14 of folding boards can be locked into the web-receiving position 100 to ensure adequate alignment of the folding boards with a web. In general, any suitable mechanism for locking a set of folding boards into the web-receiving position 100 can be utilized. For instance, referring to Figs. 1-8, in one embodiment, a locking pin 86 is utilized to inhibit rotation of the mounting arms 56 so that a set of folding boards can be locked into the web-receiving position 100. In particular, as shown in Figs. 7-8, the locking pin 86 is movably secured within a locking assembly 88 and can extend into a hollow chamber 84 that is connected to the end 55 of the mounting arms 56. The locking assembly 88 is attached to the upstanding member 77 so that when the pin 86 is extended into the hollow chamber 84 and remains therein, the arm 56 does not rotate further.

In one embodiment, as shown in Figs. 1 and 7-8, the locking pin 86 can be extended and retracted through the use of air pressure. For example, the locking pin 86 is depicted in Figs. 7-8 in its retracted state.

Air pressure can be supplied to a port 83 to force the pin 86 into the hollow chamber 84 (See Fig. 8). In particular, the air extends the pin 86 in a longitudinal direction (to the left in Fig. 8) into the hollow chamber 84. A spring 87 can be utilized to ensure that the pin 86 remains extended even if the air pressure is released.

To remove the pin 86 from the hollow chamber 84, the air pressure may then be released from the port 83 and supplied to a port 81 so that the pin 86 is forced back into its retracted state, as shown in Fig. 8. The air pressure supplied by the ports 81 and 83 can be provided by an air source (not shown) via hoses 82.

In some embodiments, the system 10 may also be provided with a mechanism for removing dust from various parts of the system. For example, dust commonly accumulates within the guide bars and turning bars. In one embodiment, to remove the dust within these bars, the pin 86 can be provided with an air channel 89 extending in a lengthwise direction through the center of the pin 86. A port 85 can supply air pressure to the air channel 89 when the pin 86 is extended. The pressurized air can flow through the air channel 89 and into one or more of the guide bars and/or turning bars via a hose (not shown) or other similar air transport mechanism.

Once locked into the web-receiving position 100, a set of folding boards can then receive and fold one or more continuous webs. As shown in Fig. 1, for example, the first set 12 of folding boards can receive a web when locked into the web-receiving position 100. To replace the folding boards with other folding boards, the pin 86 can be retracted and the mounting arms 56 can be rotated about an axis A until the second set 42 of folding boards is in the web-receiving position 100. At that point, the second set 42 of folding boards can be locked into position as described above to receive and fold one or more continuous webs.

After being folded, the web(s) can then be stacked and cut for packaging. For example, in one embodiment, as shown in Fig. 1, a conveyor 90 can transport the folded webs to another location. In the embodiment illustrated herein, a lift mechanism (not shown) can raise and/or lower the conveyor 90 so that it is capable of being placed into

communication with a web passing through the folding boards. For example, in some instances, the conveyor 90 can be lowered to allow the second set 42 of folding boards to be rotated in a counter-clockwise direction to the web-receiving position 100.

5 To facilitate the replacement of a set of folding boards, a system of the present invention may also include a variety of control features. For example, one embodiment of the present invention includes at least one controller. The controller can be a programmable logic computer (PLC), such as an Allen-Bradley Controllogix Processor, although any other  
10 controller suitable for controlling the system described above, is generally acceptable. Alternately, hard-wired circuitry, relays, software, etc., could be substituted for the PLC and used as the controller.

A controller can generally be utilized to monitor and/or adjust one or more of the attributes of system 10 in response to operator input or to  
15 one or more sensors. Referring to Fig. 8, for instance, a sensor 99 is illustrated that can detect the position of the locking pin 86. In particular, before replacing one set of folding boards for another, a controller communicates with the sensor 99 to verify that the locking pin 86 is retracted. Moreover, before feeding one or more webs to a set of folding  
20 boards, one or more controllers also communicate with the sensor 99 to verify that the locking pin 86 is extended. Moreover, other sensors, such as photoelectric sensors, can be utilized to detect a variety of system attributes.

In accordance with another aspect of the invention, a related  
25 method is provided for selectively replacing a set of folding boards for another set of folding boards. In one embodiment, for example, the method includes the step of placing a first set 12 containing at least two folding boards in a web-receiving position 100. The method further includes the step of placing a second set 42 containing at least two folding

boards in a first inactive position 200. The second set 42 of folding boards can then be selectively transferred from the first position 200 to the web-receiving position 100. During transfer, the folding boards within the second set 42 are simultaneously transferred from the first inactive position 200 to the web-receiving position 100. In some embodiments, the first set 12 of folding boards may also be selectively transferred to the first inactive position 200. In other embodiments, the first set 12 of folding boards may be selectively transferred to a second inactive position 300. The step(s) of selectively transferring the second set 42 and/or first set 12 of folding boards may be accomplished by rotating the set(s) about an axis A.

The method and system of the present invention can generally be utilized to fold one or more webs. The webs may be made of the same type or different types. For example, the webs may be paper webs, such as facial tissue, bath tissue, paper towels, and the like, as well as other types of webs, such as wet-wipes, and the like. Further, the webs can also be folded to different widths utilizing a system of the present invention. For instance, in one embodiment, the first set 12 of folding boards can be utilized to form folded tissue webs having a certain width, while a second set 42 of folding boards having a different width can be selectively interchanged therefor to form folded tissue webs of different widths. For example, the first set 12 of folding boards can be utilized to fold tissue webs in a C-fold to a width of about 150 millimeters, while the second set 42 of folding boards can be selectively interchanged with the first set 12 of folding boards to fold tissue webs in a C-fold to a width of about 110 millimeters.

While the invention has been described in detail with respect to the specific embodiments thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing, may readily



Variable	Mean	SD	Min	Max
Age	34.2	10.5	18	65
Gender	Male			
Female				
Marital status	Married			
Single				
Divorced				
Widowed				
Education	High school			
College				
Postgraduate				
Occupation	Manager			
Teacher				
Engineer				
Doctor				
Lawyer				
Artist				
Writer				
Other				
Income	\$10,000			
\$15,000				
\$20,000				
\$25,000				
\$30,000				
\$35,000				
\$40,000				
\$45,000				
\$50,000				
\$55,000				
\$60,000				
\$65,000				
\$70,000				
\$75,000				
\$80,000				
\$85,000				
\$90,000				
\$95,000				
\$100,000				
\$105,000				
\$110,000				
\$115,000				
\$120,000				
\$125,000				
\$130,000				
\$135,000				
\$140,000				
\$145,000				
\$150,000				
\$155,000				
\$160,000				
\$165,000				
\$170,000				
\$175,000				
\$180,000				
\$185,000				
\$190,000				
\$195,000				
\$200,000				
\$205,000				
\$210,000				
\$215,000				
\$220,000				
\$225,000				
\$230,000				
\$235,000				
\$240,000				
\$245,000				
\$250,000				
\$255,000				
\$260,000				
\$265,000				
\$270,000				
\$275,000				
\$280,000				
\$285,000				
\$290,000				
\$295,000				
\$300,000				
\$305,000				
\$310,000				
\$315,000				
\$320,000				
\$325,000				
\$330,000				
\$335,000				
\$340,000				
\$345,000				
\$350,000				
\$355,000				
\$360,000				
\$365,000				
\$370,000				
\$375,000				
\$380,000				
\$385,000				
\$390,000				
\$395,000				
\$400,000				
\$405,000				
\$410,000				
\$415,000				
\$420,000				
\$425,000				
\$430,000				
\$4				

**WHAT IS CLAIMED IS:**

1. A method for selectively replacing one set of folding boards with another set of folding boards in a system for folding webs, said method comprising the steps of:

5           placing a first set containing at least two folding boards in a web-receiving position;

          selectively transferring said first set of folding boards from said web-receiving position to a first inactive position; and

          selectively transferring a second set containing at least two folding  
10       boards to said web-receiving position such that the folding boards of said second set are simultaneously transferred to said web-receiving position.

2. A method as defined in claim 1, wherein said second set of folding boards is initially placed in said first inactive position before being transferred to said web-receiving position.

15       3. A method as defined in claim 1, wherein said second set of folding boards is initially placed in a second inactive position before being transferred to said web-receiving position.

          4. A method as defined in claim 3, further comprising the steps of:  
          selectively transferring a third set containing at least two folding  
20       boards from said second inactive position to said first inactive position such that the folding boards within said third set are simultaneously transferred from said second inactive position to said first inactive position.

          5. A method as defined in 1, wherein said second set of folding  
25       boards is rotatable about an axis such that the step of selectively transferring said second set to said web-receiving position is accomplished by rotating said second set about said axis.

          6. A method as defined in claim 5, wherein said first set of folding boards is also rotatable about said axis.

30       7. A method as defined in claim 6, further comprising the step of:

selectively rotating said first set of folding boards about said axis from said web-receiving position to said first inactive position.

8. A method as defined in claim 6, further comprising the step of selectively rotating said first set of folding boards about said axis from said web-receiving position to a second inactive position.

9. A method as defined in claim 8, further comprising the steps of: selectively rotating a third set of folding boards from said second inactive position to said first inactive position such that the folding boards within said third set are simultaneously transferred from said second inactive position to said first inactive position.

10. A method for selectively replacing one set of folding boards with another set of folding boards in a system for folding webs, said method comprising the steps of:

placing a first set of folding boards in a web-receiving position, said first set of folding boards being rotatable about an axis;

placing a second set of folding boards in a first inactive position, said second set of folding boards being rotatable about said axis; and

selectively rotating said second set of folding boards about said axis from said first inactive position to said web-receiving position; and

selectively rotating said first set of folding boards about said axis from said web-receiving position to either said first inactive position or a second inactive position.

11. A method as defined in claim 10, further comprising the step of selectively rotating said first set of folding boards from said web-receiving position to said first inactive position.

12. A method as defined in claim 10, further comprising the step of selectively rotating said first set of folding boards from said web-receiving position to said second inactive position.

13. A method as defined in claim 12, further comprising the steps of:

placing a third set of folding boards in said second inactive position, said third set of folding boards being rotatable about said axis; and

selectively rotating said third set of folding boards from said second inactive position to said first inactive position.

5           14. A system for selectively replacing a first set of folding boards with a second set of folding boards, said system comprising:

          a first frame assembly secured to a first set of folding boards, said first frame assembly being rotatable about an axis for placing said first set of folding boards into a web-receiving position;

10           a second frame assembly secured to a second set of folding boards, said second frame assembly being rotatable about said axis such that said second set of folding boards is also capable of being placed into said web-receiving position;

          said second frame assembly being in operative communication  
15           with said first frame assembly such that said second frame assembly and said first frame assembly are simultaneously rotatable about said axis.

          15. A system as defined in claim 14, wherein said first frame assembly and said second frame assembly are connected to at least one mounting arm.

20           16. A system as defined in claim 14, wherein the rotation of said first frame assembly and said second frame assembly is induced by a rotary actuator.

          17. A system as defined in claim 14, wherein the rotation of said first frame assembly and said second frame assembly is induced by a  
25           motor.

          18. A system as defined in claim 14, further comprising a locking assembly for selectively locking a set of folding boards into said web-receiving position.

30           19. A system as defined in claim 18, wherein said locking assembly comprises a locking pin.

20. A system as defined in claim 18, wherein said pin is provided with an air channel for removing dust from a set of folding boards located at said web-receiving position.

5 21. A system as defined in claim 14, wherein said first frame assembly comprises a continuous frame.

22. A system as defined in claim 14, wherein said first frame assembly comprises a discontinuous frame.

24. A system as defined in claim 14, wherein said second frame assembly comprises a continuous frame.

10 25. A system as defined in claim 14, wherein said second frame assembly comprises a discontinuous frame.

005050" 2044E960

### **Abstract of the Disclosure**

A system and method for selectively replacing one set of folding boards for another set of folding boards is provided. The system can include a first frame assembly secured to a first set of folding boards. The first set of folding boards can be initially placed in a web-receiving position for receiving and folding webs, such as tissue webs. The system can also include a second frame assembly secured to a second set of folding boards, which is placed in another position. The first set of folding boards at the web-receiving position can then be selectively replaced by the second set of folding boards. For example, in one embodiment, each frame assembly can be simultaneously rotated about an axis to replace the first set with the second set.

005080" 201403 080900

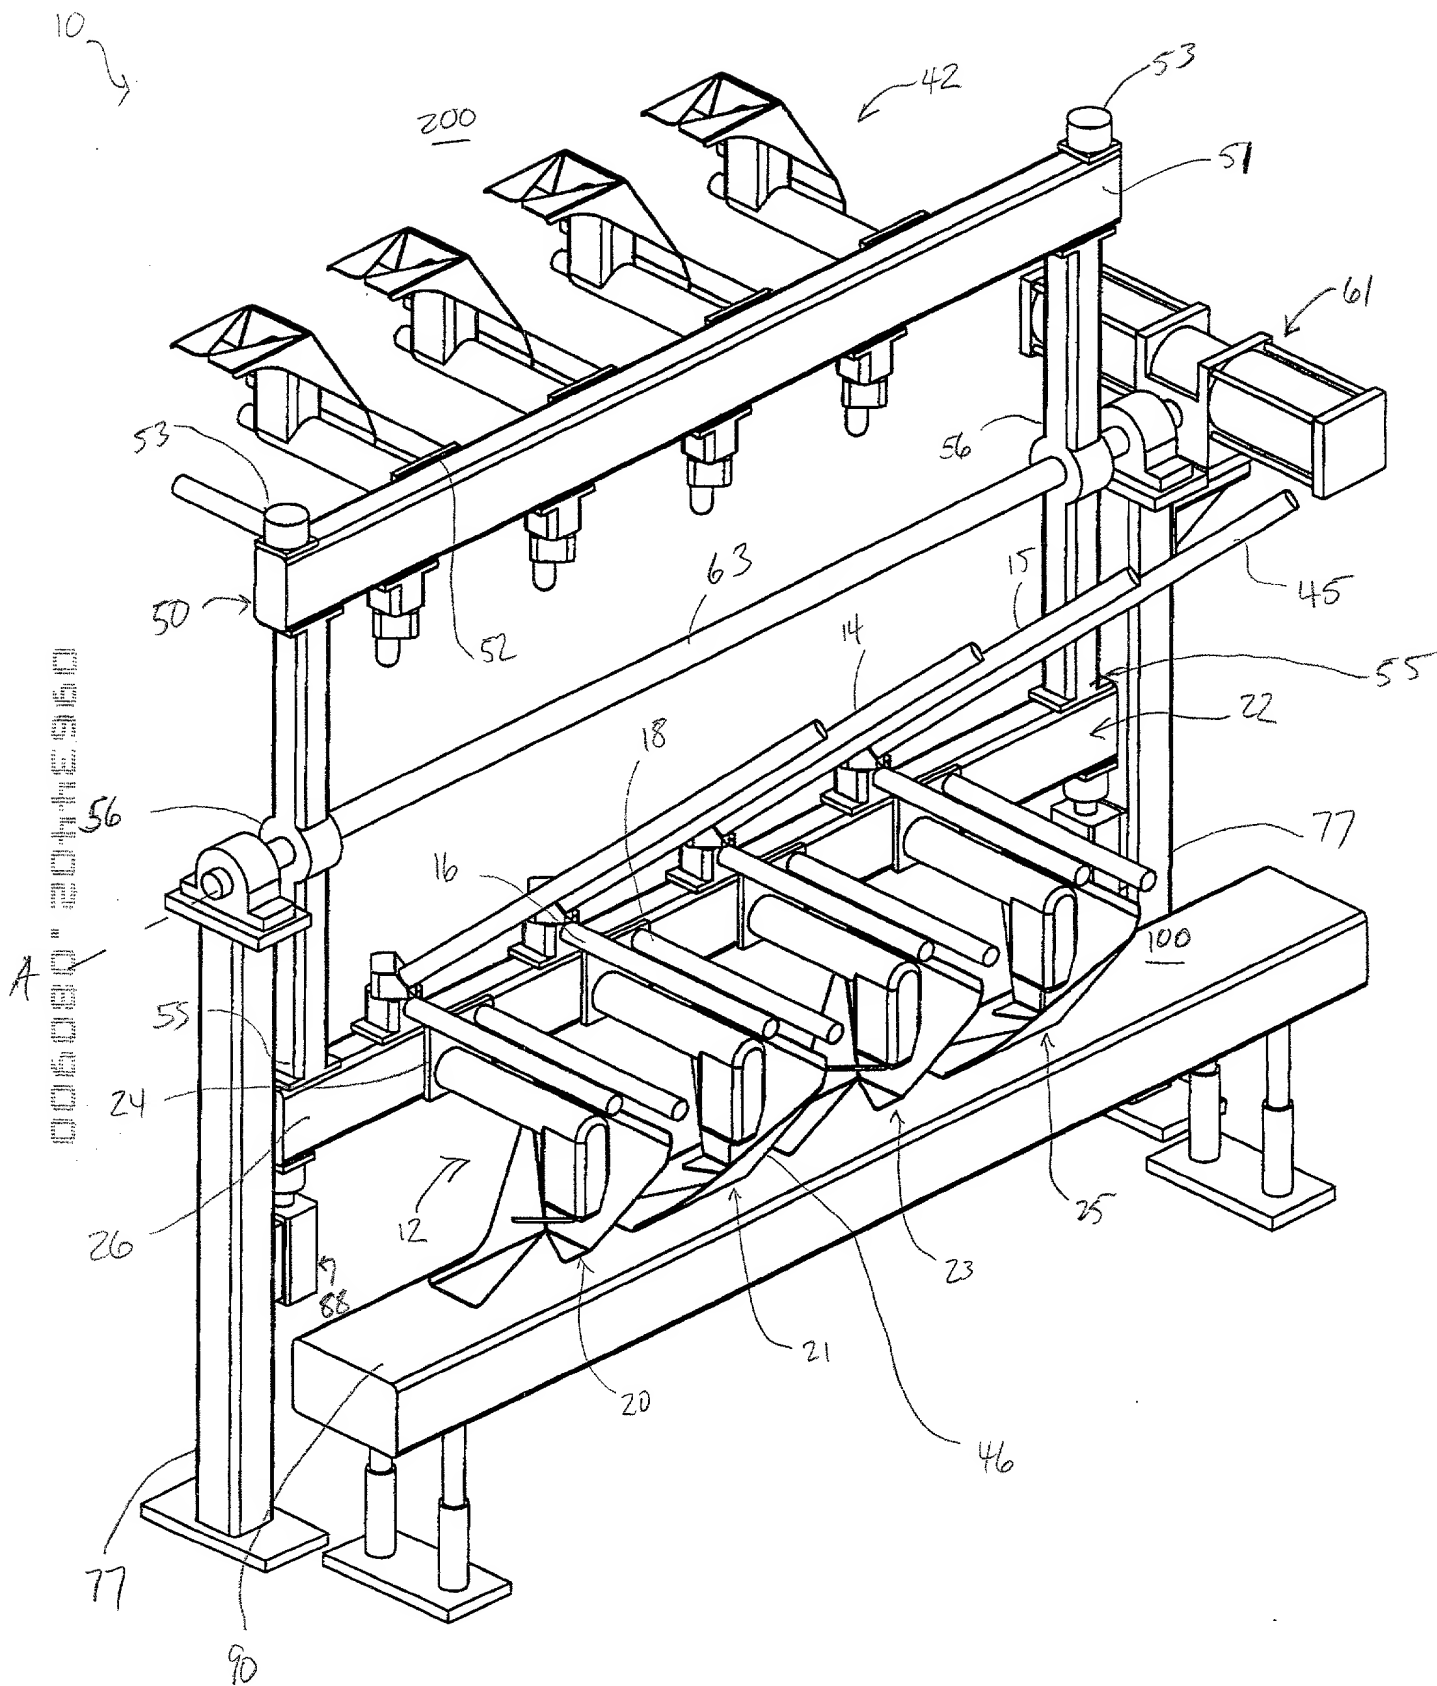


FIGURE 1

Coulam et al.		Coulam et al.	
Study	Year	Study	Year
1	1998	1	1998
2	1998	2	1998
3	1998	3	1998
4	1998	4	1998
5	1998	5	1998
6	1998	6	1998
7	1998	7	1998
8	1998	8	1998
9	1998	9	1998
10	1998	10	1998
11	1998	11	1998
12	1998	12	1998
13	1998	13	1998
14	1998	14	1998
15	1998	15	1998
16	1998	16	1998
17	1998	17	1998
18	1998	18	1998
19	1998	19	1998
20	1998	20	1998
21	1998	21	1998
22	1998	22	1998
23	1998	23	1998
24	1998	24	1998
25	1998	25	1998
26	1998	26	1998
27	1998	27	1998
28	1998	28	1998
29	1998	29	1998
30	1998	30	1998
31	1998	31	1998
32	1998	32	1998
33	1998	33	1998
34	1998	34	1998
35	1998	35	1998
36	1998	36	1998
37	1998	37	1998
38	1998	38	1998
39	1998	39	1998
40	1998	40	1998
41	1998	41	1998
42	1998	42	1998
43	1998	43	1998
44	1998	44	1998
45	1998	45	1998
46	1998	46	1998
47	1998	47	1998
48	1998	48	1998
49	1998	49	1998
50	1998	50	1998
51	1998	51	1998
52	1998	52	1998
53	1998	53	1998
54	1998	54	1998
55	1998	55	1998
56	1998	56	1998
57	1998	57	1998
58	1998	58	1998
59	1998	59	1998
60	1998	60	1998
61	1998	61	1998
62	1998	62	1998
63	1998	63	1998
64	1998	64	1998
65	1998	65	1998
66	1998	66	1998
67	1998	67	1998
68	1998	68	1998
69	1998	69	1998
70	1998	70	1998
71	1998	71	1998
72	1998	72	1998
73	1998	73	1998
74	1998	74	1998
75	1998	75	1998
76	1998	76	1998
77	1998	77	1998
78	1998	78	1998
79	1998	79	1998
80	1998	80	1998
81	1998	81	1998
82	1998	82	1998
83	1998	83	1998
84	1998	84	1998
85	1998	85	1998
86	1998	86	1998
87	1998	87	1998
88	1998	88	1998
89	1998	89	1998
90	1998	90	1998
91	1998	91	1998
92	1998	92	1998
93	1998	93	1998
94	1998	94	

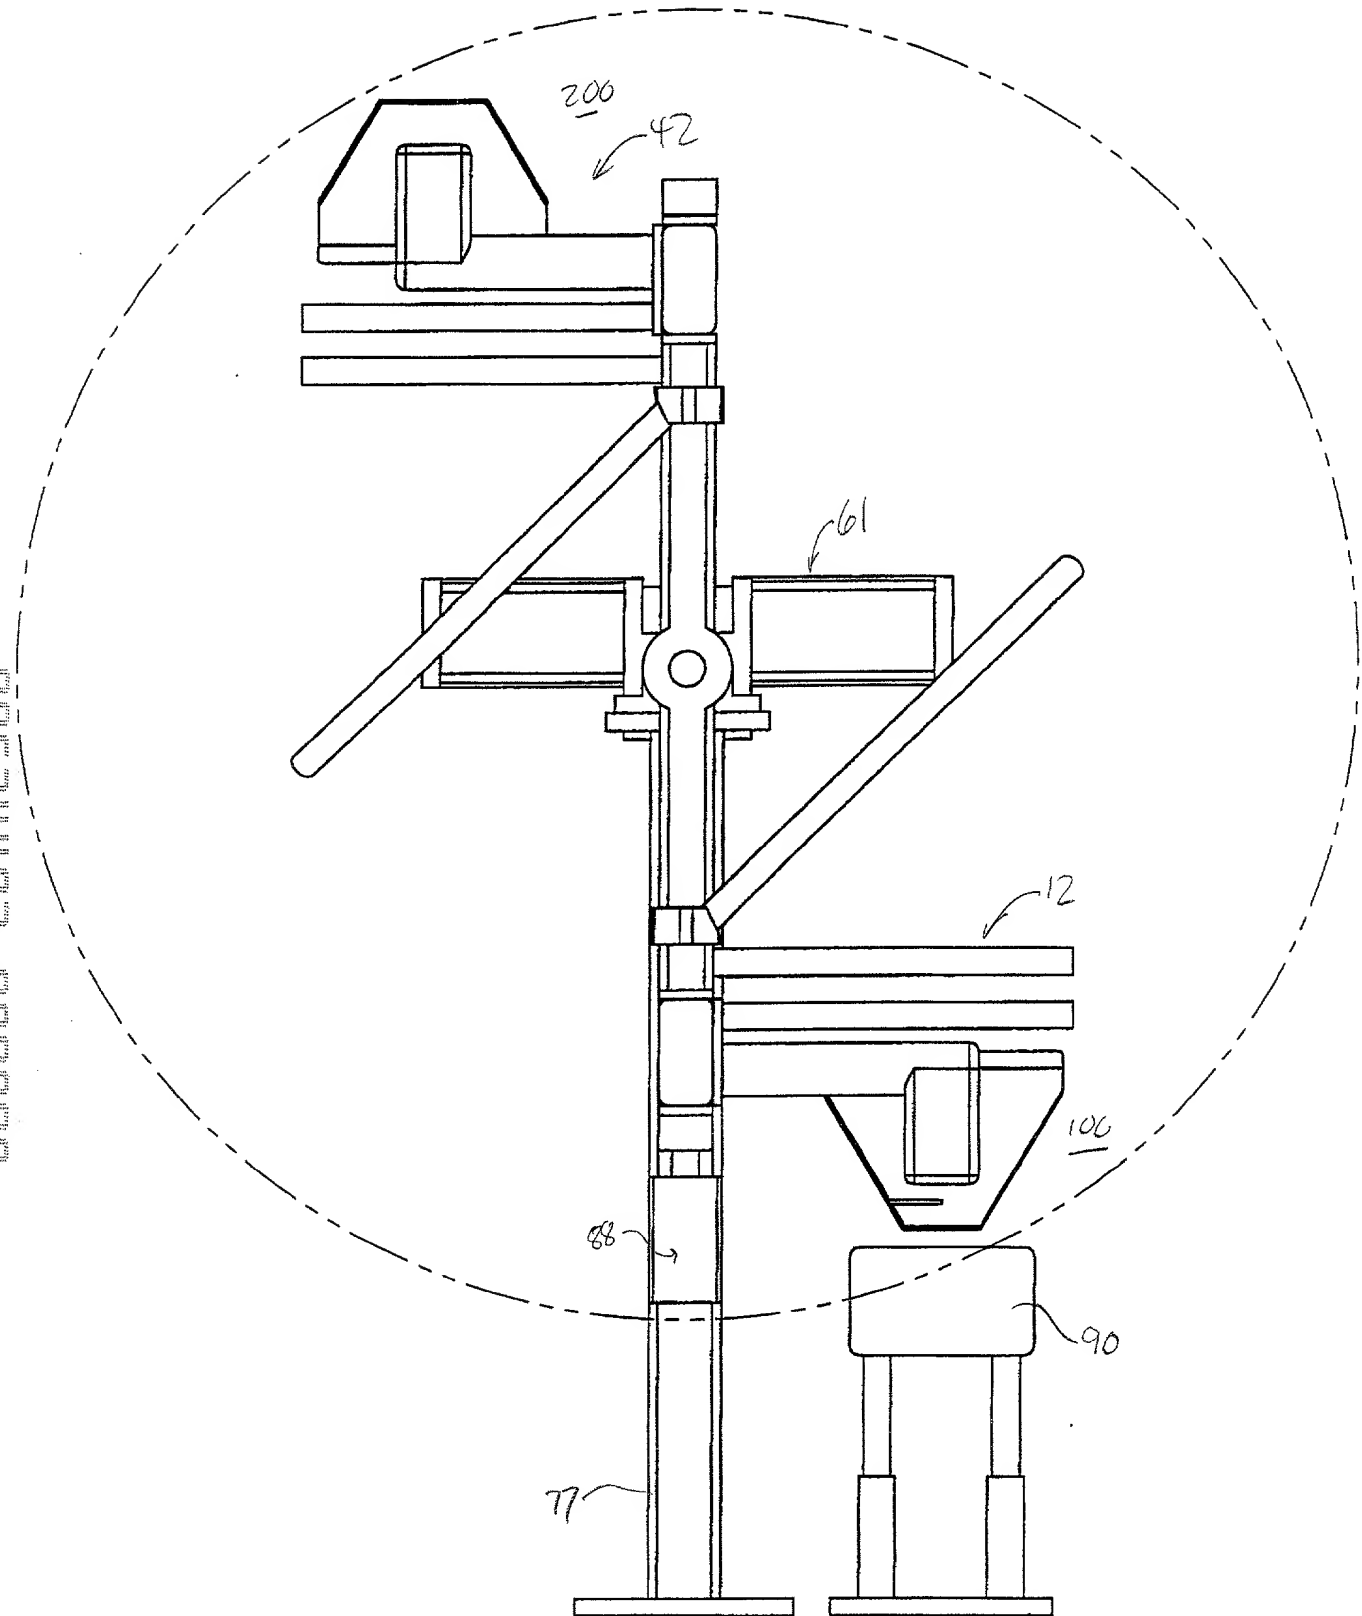


FIGURE 2





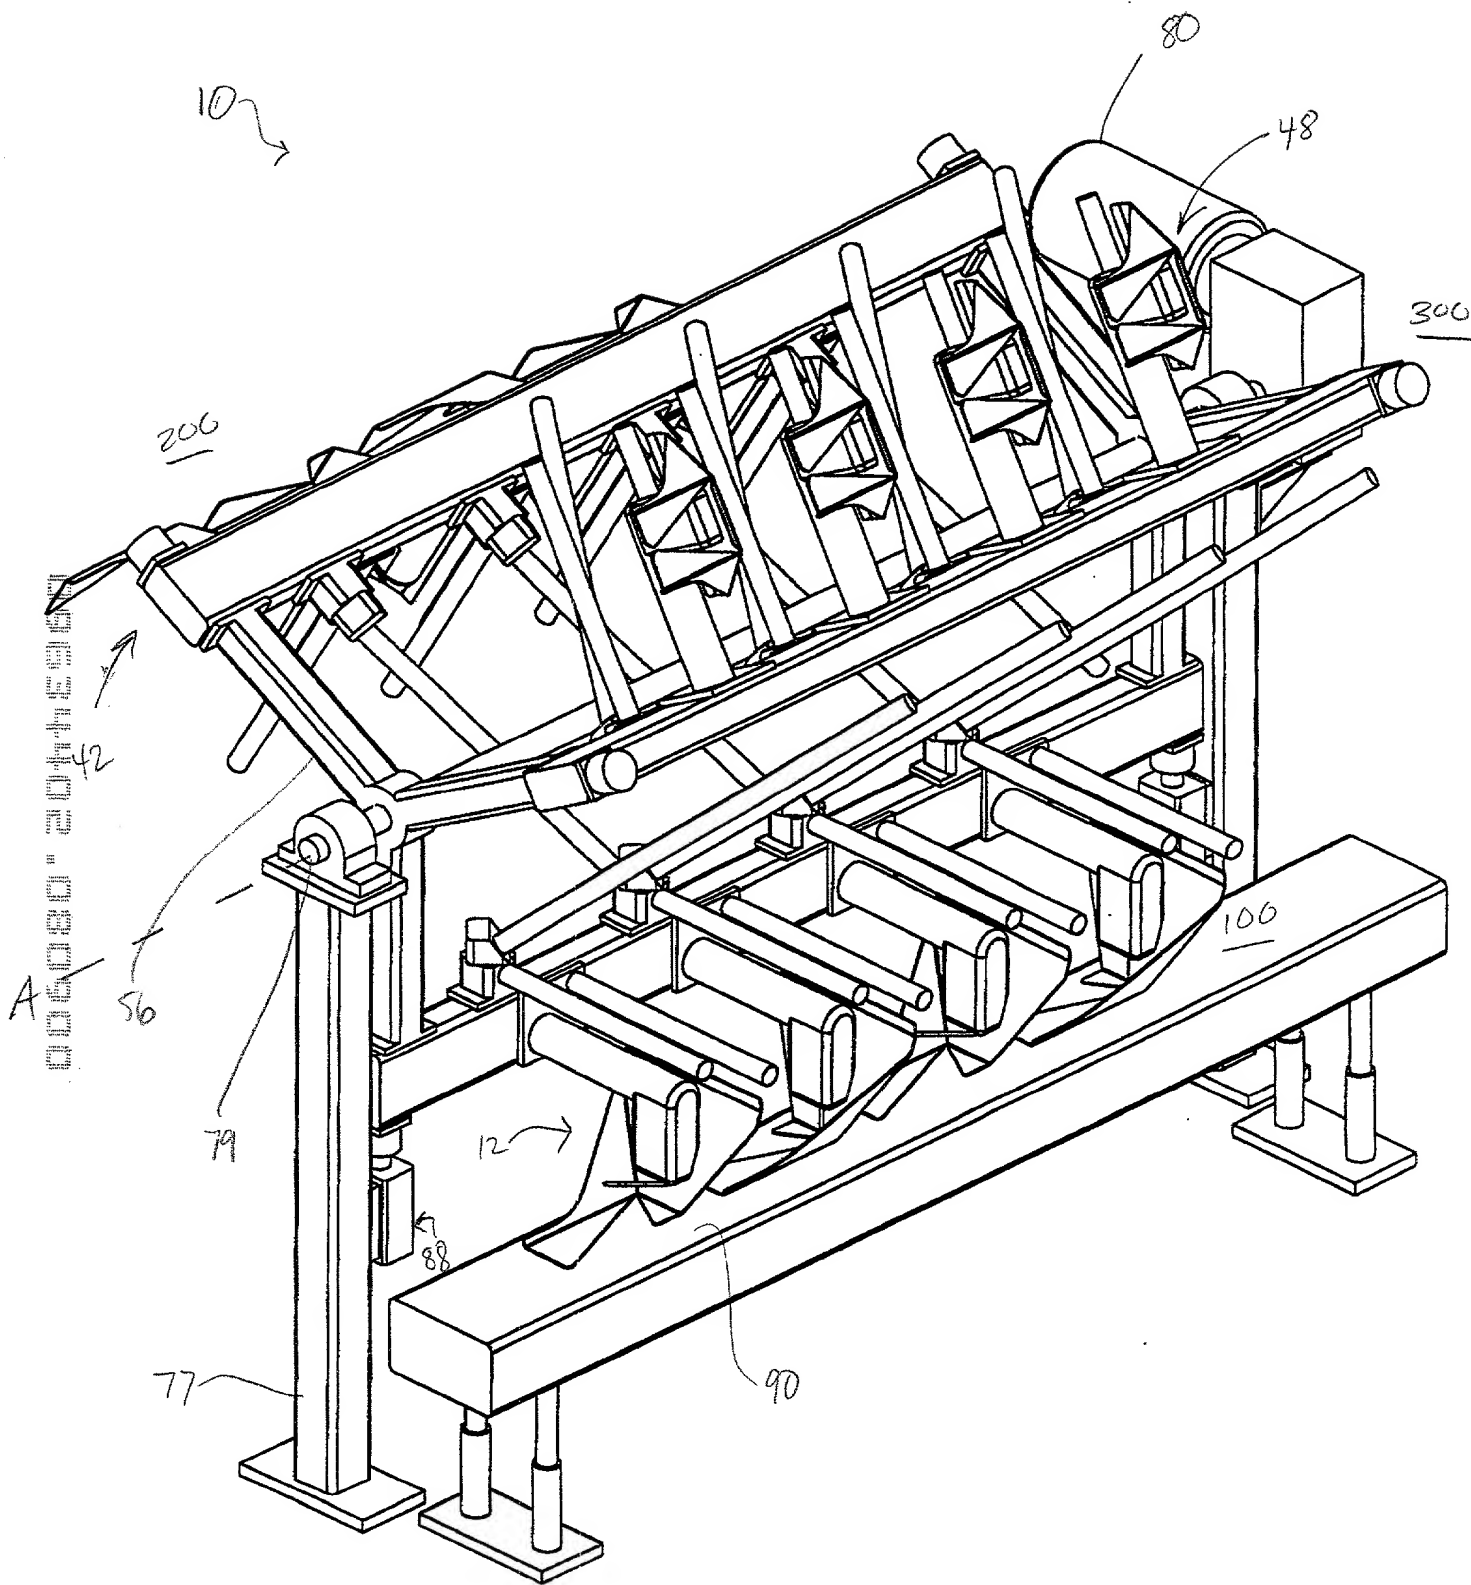


FIGURE 4

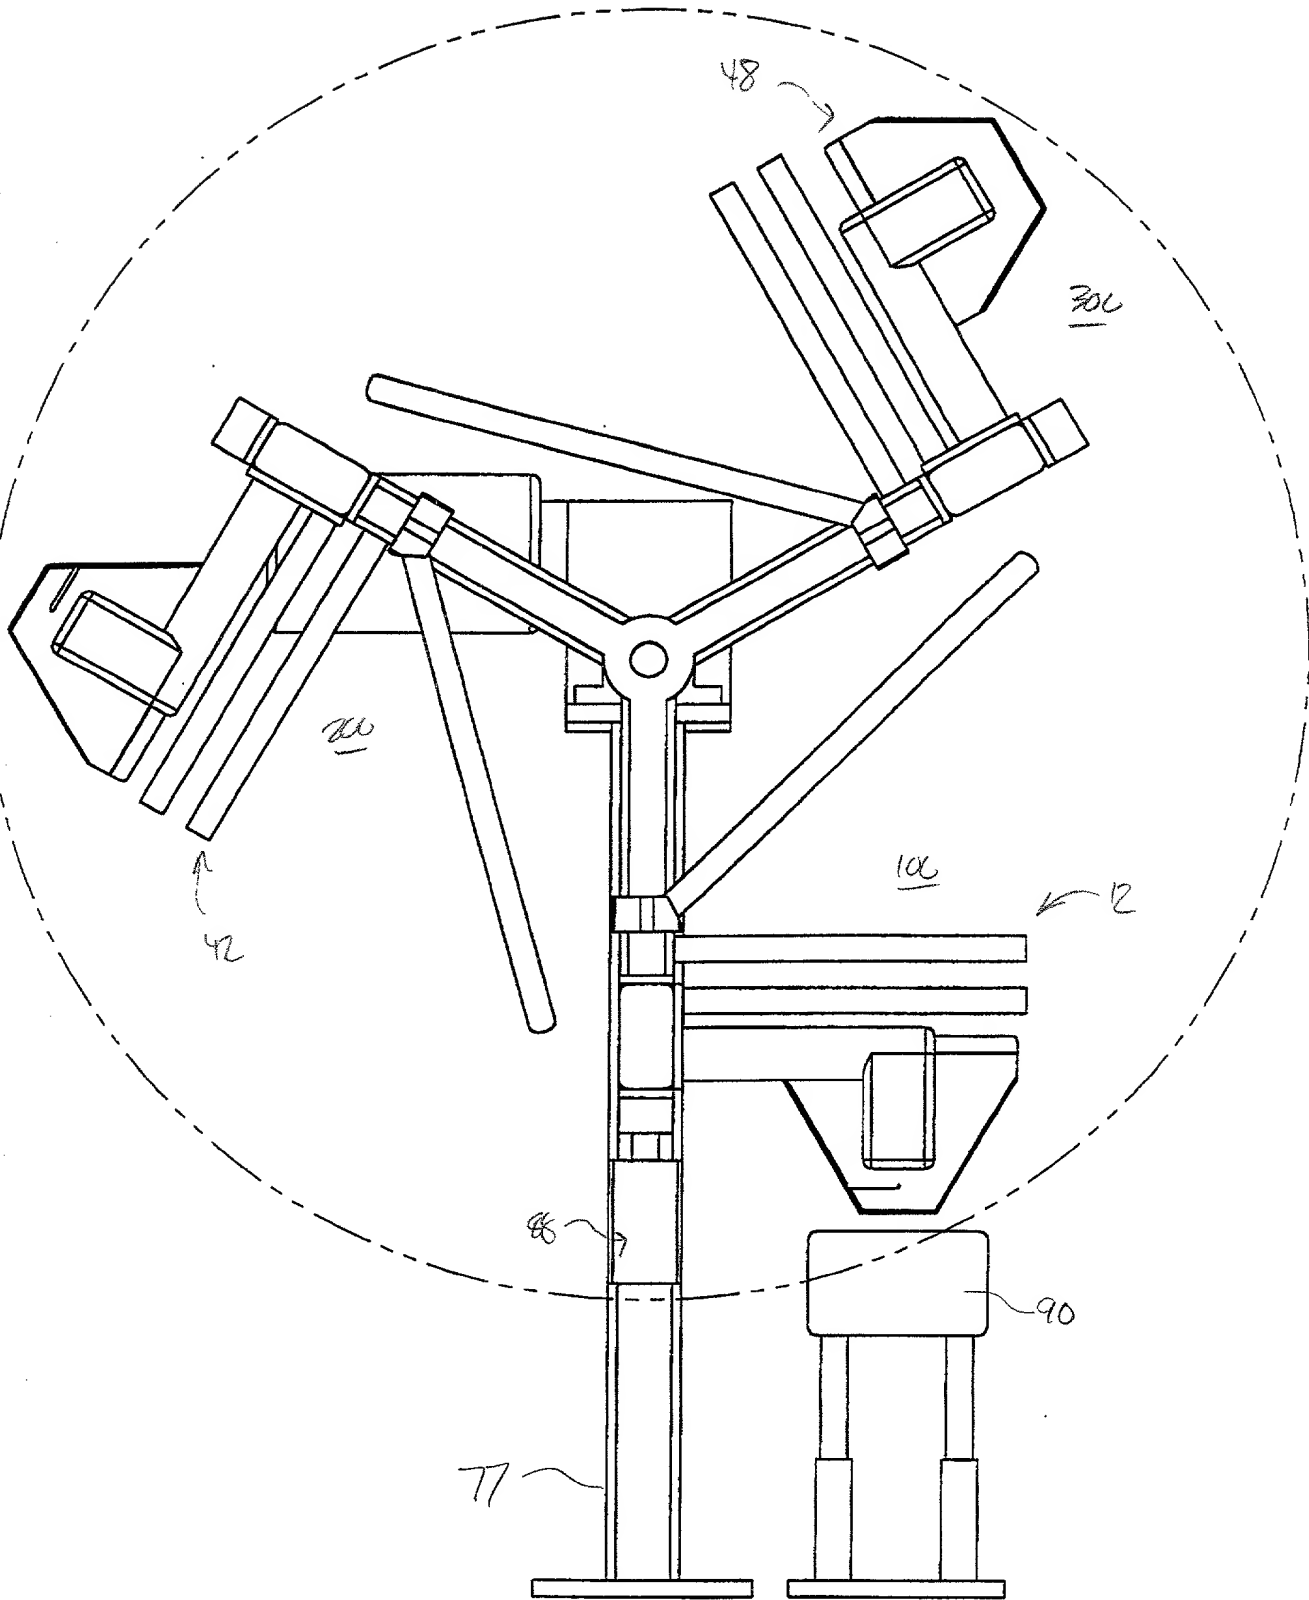
[illegible]

FIGURE 5

006080" 2044560

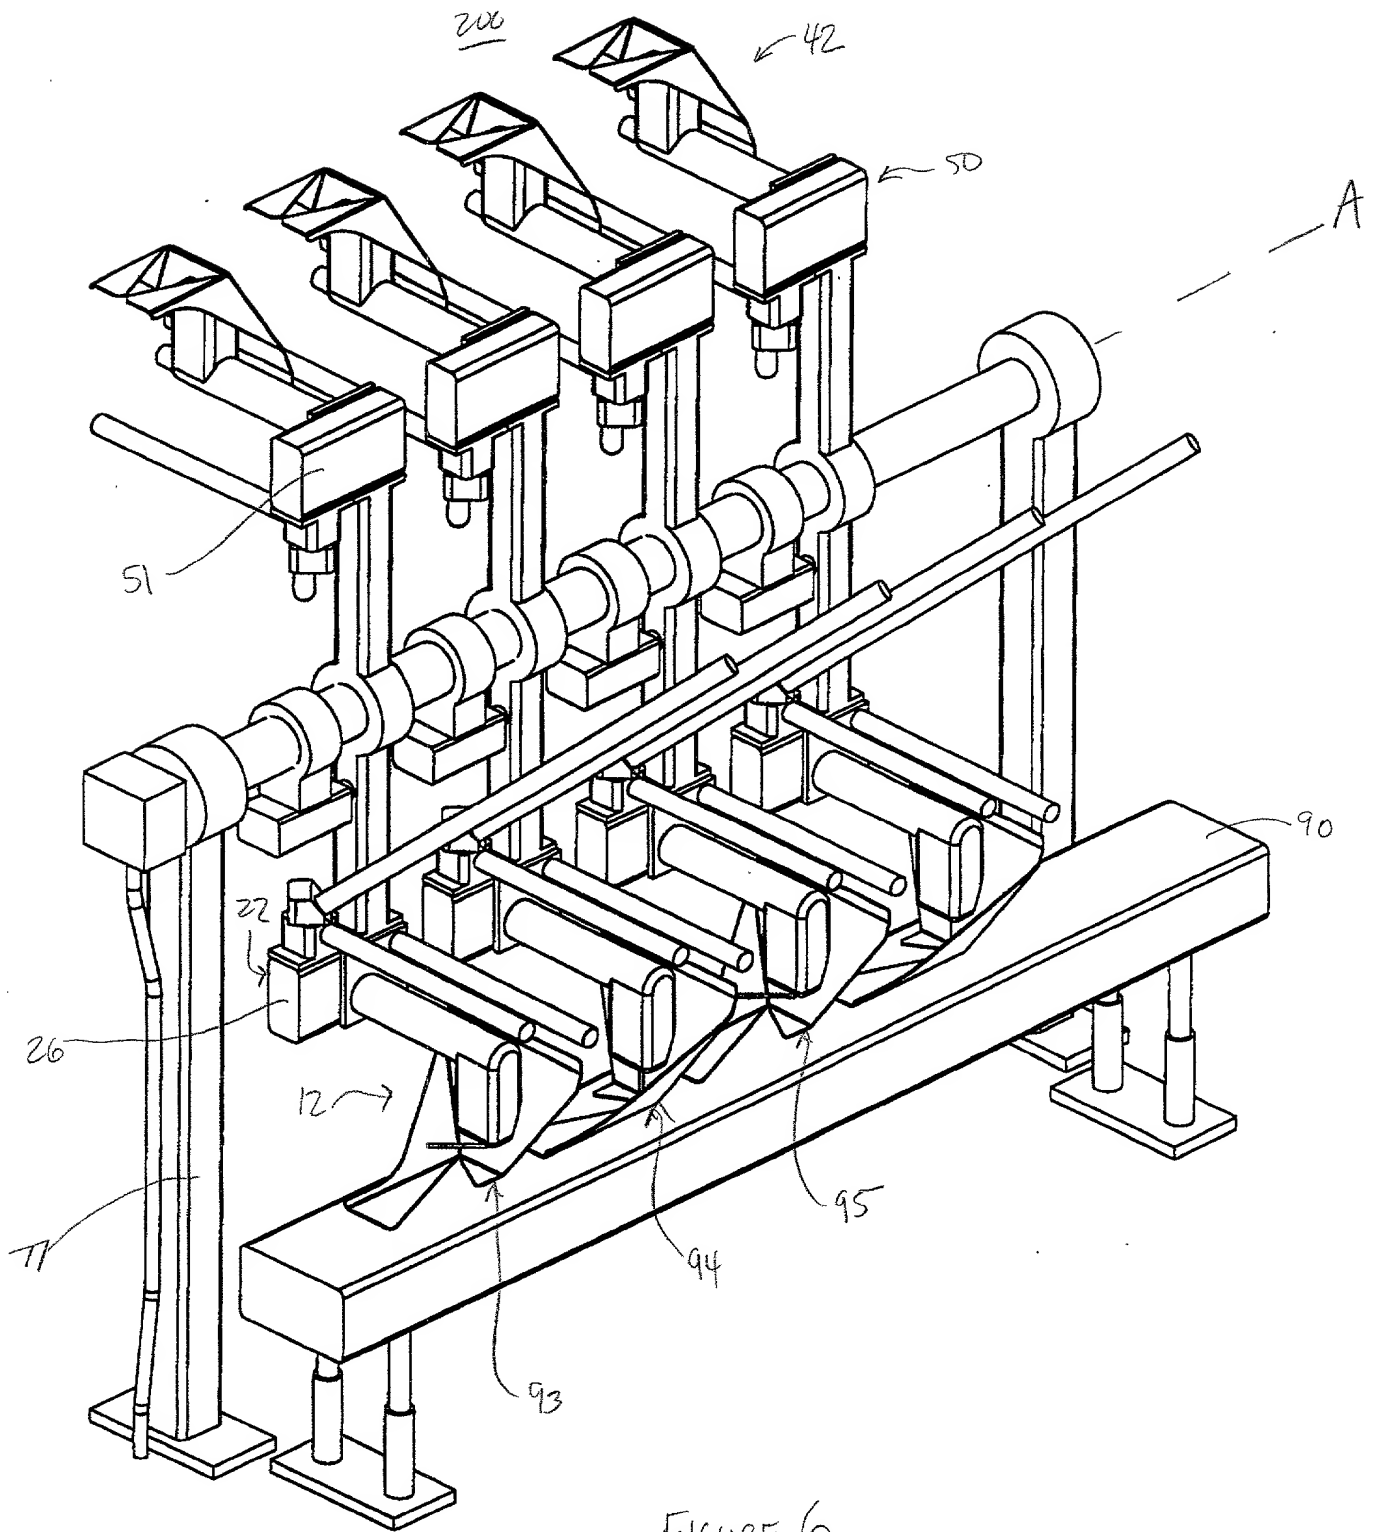


FIGURE 6

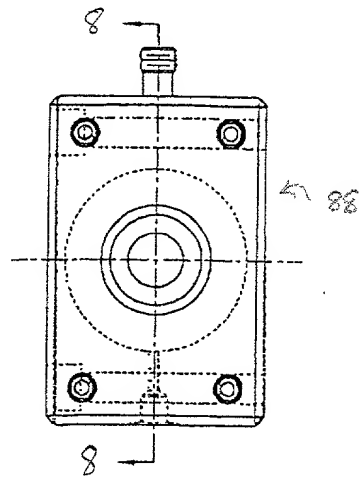
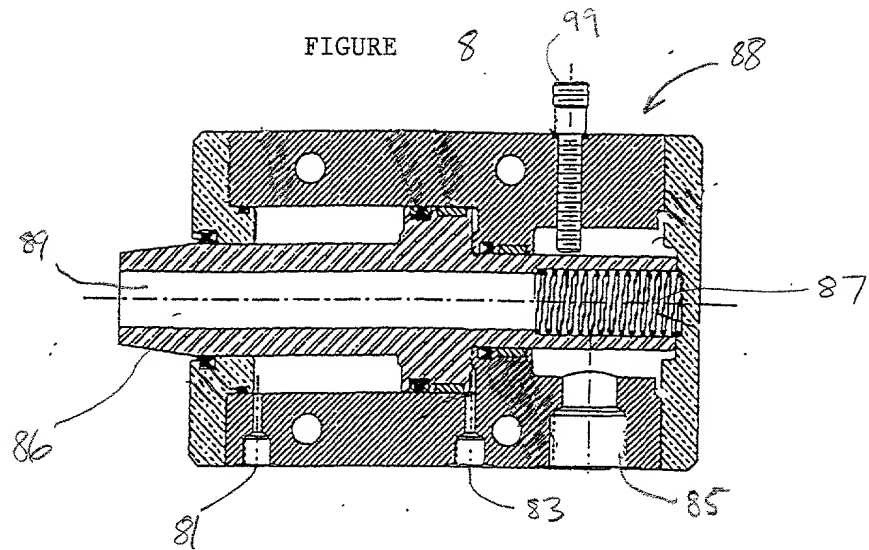


FIGURE 7

006080" 2014E 960

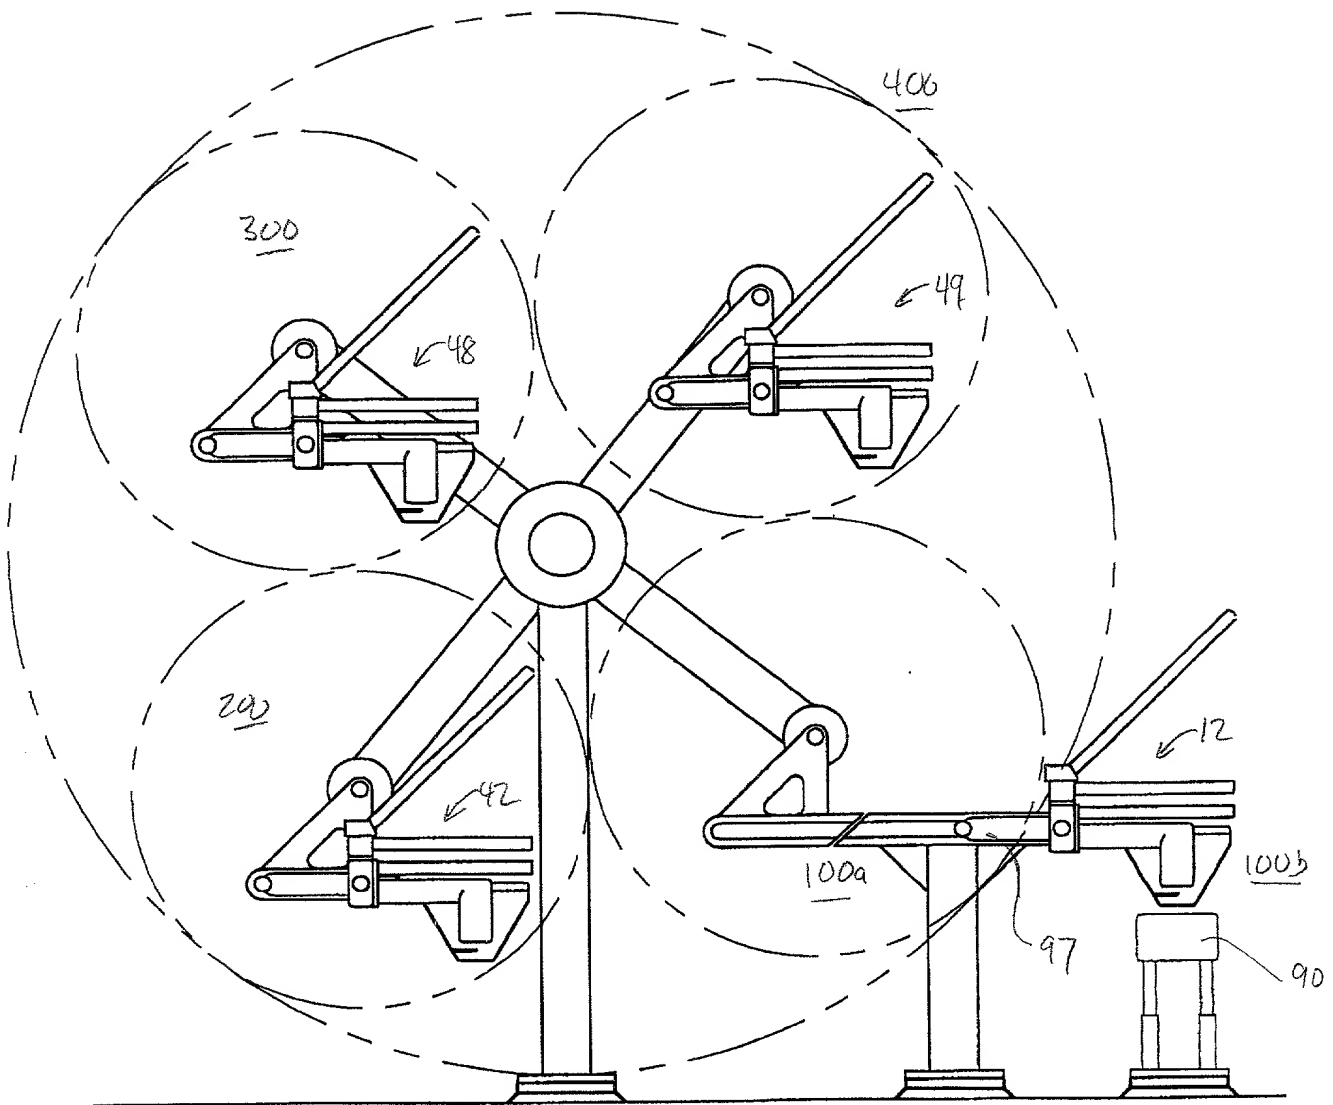


FIGURE 9